







DOOR STATION SURFACE MOUNT - 4" TOUCH DISPLAY

SPARK THE COMPLETE DEVICE FOR VILLA, OFFICE OR CONDOMINIUM ACCESS.

Spark 300 offers a comprehensive hardware package, making it incredibly versatile. It serves both as a video intercom station for villas and buildings and as an advanced access control device for commercial and corporate settings. This dual functionality makes it the ideal choice for those seeking security, advanced technology, and ease of use in one adaptable product.

FLEXIBLE FOR ANY NEED

The **customizable touchscreen display**, paired with sophisticated voice and light messaging, makes every interaction unique. Presence sensors activate messages and lights, ensuring an **intuitive experience for both property owners and guests**. With Spark, every detail is designed to simplify access and make it modern and personalized.

DESIGN

Spark stands out for its **innovative and intuitive design**, combining aesthetics and functionality. The choice of materials, favoring metal and refined colors, gives a unique and distinctive touch to the access.

SYSTEM ARCHITECTURE

IpDoor Access offers a flexible architecture adaptable to contexts. Options include: **Open Infrastructure on Cloud (AWS)**: no installation constraints, allowing remote configuration and maintenance, alarms to the installer, and complete IP integration; **Closed Infrastructure "On Premise"**: for companies with strict network policies that do not allow cloud access.

ROBUSTNESS AND SECURITY

Equipped with **advanced sensors**, it can send remote alarms in case of vandalism, break-in attempts, or unauthorized presence in restricted areas during specific hours.

ERGONOMICS

Every aspect is **designed to be user-centric**. The touch display offers immediate and fast interactions, while the presence of a metallic physical button ensures a basic call is always accessible, making the use of Spark a smooth and enjoyable experience for every user.

COLORS




	INSTALLATION	Surface mounting
JRES	DIMENSIONS	187 x 113 x 30 mm
	MATERIAL	Painted metal
EATU	COLOURS	Shadow Grey - Silver
MECHANICAL FEATURES	WEIGHT	850 gr
	PROTECTION RATING	IP65 / IK07
	BUTTONS TYPE	N.1 or N.4 capacitive buttons on metal with backlight
	POWER	PoE 802.3af / Local 24Vdc / 1A
	CONSUMPTION	2,5W (Standby) / 5W (Max)
	DIMENSIONS	4"
DISPLAY	TOUCH SCREEN	Capacitive with rain proof
	RESOLUTION	1280 x 720
	BRIGHTNESS	1100 cd/m ²
	ТҮРЕ	IPS
VIDEO	ТҮРЕ	Simultaneous dual stream H265
	MAIN STREAM	Full HD 30fps@1920x1080
	SECONDARY STREAM	WQVGA 30fps@424x240
AUDIO	LOUDSPEAKER	1 x 2W
	MICROPHONES	N.2 digitals
	DSP	AEC, ANS, AGC
	RESOLUTION	2576 x 1456
CAMERA	VIEW ANGLE	H=170° V= 90°
	SENSOR	1/3" CMOS
	SENSITIVITY	Color 0.02 Lux - B/W 0.0 Lux with IR LED on
	ILLUMINATION	4 IR LED Illumination range 5m
	NIGHT VISION	Day/night mode with mechanical IR cut filter
	ETHERNET	
≻	WI-FI	RJ45 10/100 Mbps 2.4/5GHz IEE802.11 b,g,n,ac
TIVI	BLUETOOTH	4.2 / BLE
ECT	R\$485	RS485 Master/Slave: ASCII / Modbus RTU
CONNECTIVITY	NFC	13.56 MHz, Read/Write. MIFARE: Classic, Ultralight, Plus, DESFire
	LTE	Optional in models with LTE module
INPUTS OUTPUTS	LOCK (ELECTRIC LOCK)	12Vdc@1A impulsive output
	AUXILIARY RELAY	NO dry contact output - 24Vdc@2A max (Monostable Programmable 1-30 sec)
	INPUTS	2 Optoisolated Pull-up inputs
SENSORS		
	MOVEMENT	Radar (distance and direction up to 5 meters)
		Anti-shock and vibration sensor
	TAMPERING	Forced opening sensor
OPTIONAL MODULES	LTE	LTE module for data connectivity
	FACE RECOGNITION	Dual camera module for access control based on face recognition
	DDA	HL/IDL audio induction loop
	RF REMOTE CONTROL	433 MHz transceiver module









113 mm


EXPLORE THE FEATURES AND OPTIONS

MULTIPLE ACCESS MODES

IpDoor Access supports a variety of access modes for flexibility and security. Users can choose from several options, including:

- PIN code for personalized access;
- Mifare Badge, practical and fast;
- Mobile device NFC;
- **QR Code**, ideal for temporary visitors or events;
- **Bluetooth**, for access with the smartphone in your pocket;
- Facial recognition, for maximum security;
- Voice or geolocated commands: for barrier-free access.

The system architecture allows for the creation of personal credentials for owners or employees, ensuring secure and controlled access. It also offers the possibility to generate temporary credentials for occasional guests, facilitating flexible and secure access management.

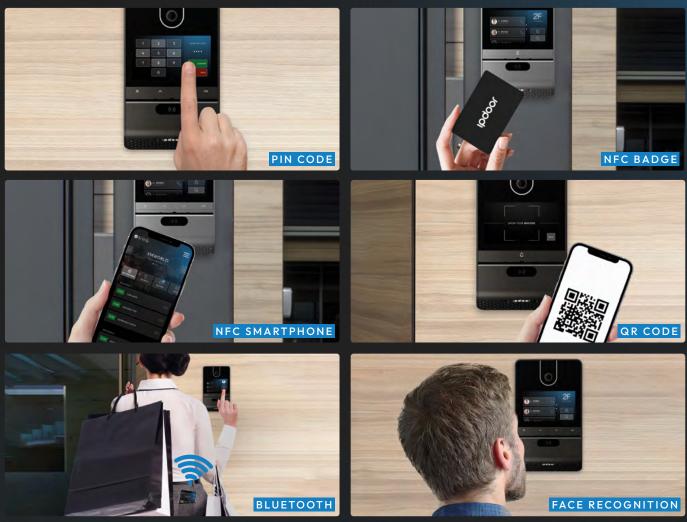

* Facial Recognition function requires a dedicated door station version.

2 CUSTOMIZABLE INTERFACE

The high-resolution display allows for the creation of a personalized and distinctive user interface, transforming the entrance into a unique and welcoming experience. This customization adds a touch of elegance and originality, reflecting the individual style of each building, whether residential or commercial.



CUSTOMIZABLE WIDE SPACE FOR SINGLE HOMES NAVIGABLE BUTTONS FOR MULTI-UNIT BUILDINGS


2F

6

Q

1 2 3 CHTEA PIN CODE 4 5 6 7 8 9 OK CONFIRM 0 X 00

NUMERIC KEYPAD FOR LARGE BUILDINGS WITH MULTIPLE NAMES

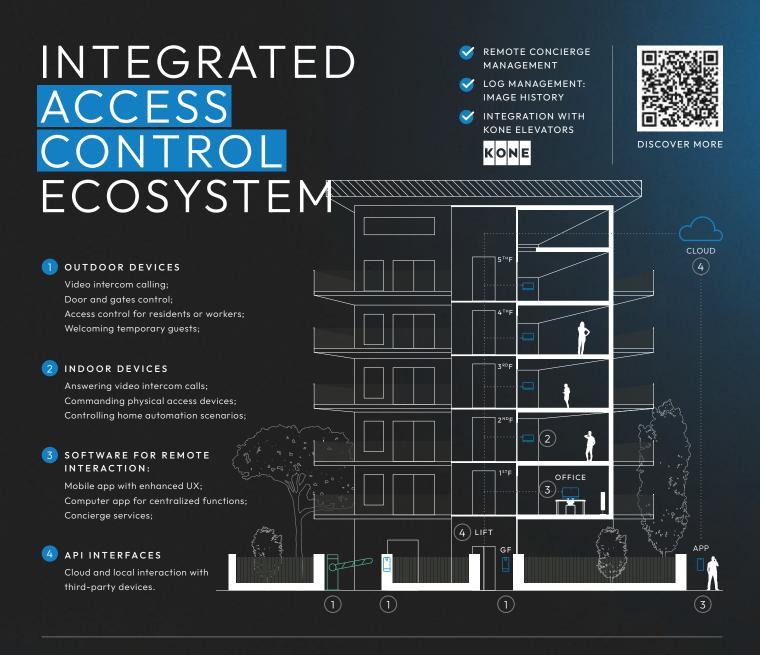

Spark is meticulously engineered to work in harmony with the IpDoor system. This integration brings key benefits for superior control and sophisticated management of access points, and ensures a seamless and efficient operation, elevating the standard of access control technology with a powerful device.

INTEGRATIONS

Thanks to IP technology and open APIs, the IpDoor system has high design flexibility, allowing you to integrate third-party systems in a secure and flexible way. This allows you to expand and customize, with other smart devices, a project without limitations, enriching your daily life with comfort and cutting-edge technology.

REAL-TIME DIAGNOSTICS

Real-time monitoring of the status and functionalities is possible. This advanced system provides detailed data and information on the operation of the plant, allowing for efficient maintenance and quick resolution of any problems or malfunctions. Predictive diagnostics and maintenance are facilitated by the development of a reliable system, managed through a proprietary console, thus ensuring an optimal user experience and simplified management of assistance, even remotely thanks to the intuitive control and monitoring app.

HOME AUTOMATION AND SCENARIOS

IpDoor allows the creation of automated scenarios for access management, ensuring greater security and more flexible and personalized control. IpDoor transforms every environment into a more connected and responsive space to individual needs, creating transit flows and automations that allow entry and movement in a fluid manner. Easy, like arriving home, seeing the front door opening, the driveway lights turning on, the entrance door opening and the elevator already ready to take me to my home floor.





IpDoor S.r.l.

Via Andreon, 2F/2G 35010 - Vigonza (PD) | Italy (+39) 049 825 6725 info@ipdoor.com

IPDOOR.COM

CE